

## E02ZAF – NAG Fortran Library Routine Document

**Note.** Before using this routine, please read the Users' Note for your implementation to check the interpretation of bold italicised terms and other implementation-dependent details.

### 1 Purpose

E02ZAF sorts two-dimensional data into rectangular panels.

### 2 Specification

```

SUBROUTINE E02ZAF(PX, PY, LAMDA, MU, M, X, Y, POINT, NPOINT,
1             ADRES, NADRES, IFAIL)
  INTEGER     PX, PY, M, POINT(NPOINT), NPOINT, ADRES(NADRES),
1             NADRES, IFAIL
  real        LAMDA(PX), MU(PY), X(M), Y(M)

```

### 3 Description

A set of  $m$  data points with rectangular Cartesian co-ordinates  $x_r, y_r$  are sorted into panels defined by lines parallel to the  $y$  and  $x$  axes. The intercepts of these lines on the  $x$  and  $y$  axes are given in  $LAMDA(i)$ , for  $i = 5, 6, \dots, PX - 4$  and  $MU(j)$ , for  $j = 5, 6, \dots, PY - 4$ , respectively. The subroutine orders the data so that all points in a panel occur before data in succeeding panels, where the panels are numbered from bottom to top and then left to right, with the usual arrangement of axes, as shown in the diagram. Within a panel the points maintain their original order.

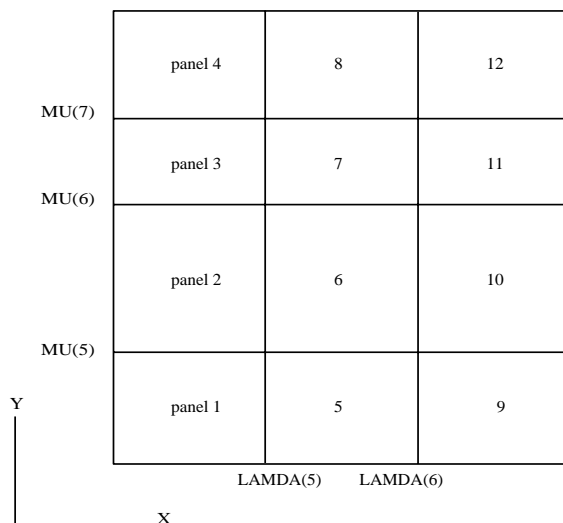


Figure 1

A data point lying exactly on one or more panel sides is taken to be in the highest-numbered panel adjacent to the point. The subroutine does not physically rearrange the data, but provides the array POINT which contains a linked list for each panel, pointing to the data in that panel. The total number of panels is  $(PX - 7) \times (PY - 7)$ .

### 4 References

None.

## 5 Parameters

- 1: PX — INTEGER *Input*  
 2: PY — INTEGER *Input*

*On entry:* PX and PY must specify eight more than the number of intercepts on the  $x$  axis and  $y$  axis, respectively.

*Constraint:*  $PX \geq 8$  and  $PY \geq 8$ .

- 3: LAMDA(PX) — *real* array *Input*

*On entry:* LAMDA(5) to LAMDA(PX – 4) must contain, in non-decreasing order, the intercepts on the  $x$  axis of the sides of the panels parallel to the  $y$  axis.

- 4: MU(PY) — *real* array *Input*

*On entry:* MU(5) to MU(PY – 4) must contain, in non-decreasing order, the intercepts on the  $y$  axis of the sides of the panels parallel to the  $x$  axis.

- 5: M — INTEGER *Input*

*On entry:* the number  $m$  of data points.

- 6: X(M) — *real* array *Input*

- 7: Y(M) — *real* array *Input*

*On entry:* the co-ordinates of the  $r$ th data point  $(x_r, y_r)$ , for  $r = 1, 2, \dots, m$ .

- 8: POINT(NPOINT) — INTEGER array *Output*

*On exit:* for  $i = 1, 2, \dots, \text{NADRES}$ , POINT( $m + i$ ) = I1 is the index of the first point in panel  $i$ , POINT(I1) = I2 is the index of the second point in panel  $i$  and so on.

POINT(IN) = 0 indicates that X(IN),Y(IN) was the last point in the panel.

The co-ordinates of points in panel  $i$  can be accessed in turn by means of the following instructions:

```

      IN = M + I
10  IN = POINT(IN)
      IF (IN.EQ. 0) GOTO 20
      XI = X(IN)
      YI = Y(IN)
      .
      .
      .
      GOTO 10
20  ...

```

- 9: NPOINT — INTEGER *Input*

*On entry:* the dimension of the array POINT as declared in the (sub)program from which E02ZAF is called.

*Constraint:*  $\text{NPOINT} \geq M + (PX - 7) \times (PY - 7)$ .

- 10: ADRES(NADRES) — INTEGER array *Workspace*

- 11: NADRES — INTEGER *Input*

*On entry:* the value  $(PX - 7) \times (PY - 7)$ , the number of panels into which the  $(x, y)$  plane is divided.

- 12: IFAIL — INTEGER *Input/Output*

*On entry:* IFAIL must be set to 0, –1 or 1. For users not familiar with this parameter (described in Chapter P01) the recommended value is 0.

*On exit:* IFAIL = 0 unless the routine detects an error (see Section 6).

## 6 Error Indicators and Warnings

If on entry `IFAIL = 0` or `-1`, explanatory error messages are output on the current error message unit (as defined by `X04AAF`).

Errors detected by the routine:

`IFAIL = 1`

The intercepts in the array `LAMDA`, or in the array `MU`, are not in non-decreasing order.

`IFAIL = 2`

On entry, `PX < 8`,  
 or `PY < 8`,  
 or `M ≤ 0`,  
 or `NADRES ≠ (PX - 7) × (PY - 7)`,  
 or `NPOINT < M + (PX - 7) × (PY - 7)`.

## 7 Accuracy

Not applicable.

## 8 Further Comments

The time taken by this routine is approximately proportional to  $m \times \log(\text{NADRES})$ .

This subroutine was written to sort two dimensional data in the manner required by routine `E02DAF`. The first 9 parameters of `E02ZAF` are the same as the parameters in `E02DAF` which have the same name.

## 9 Example

This example program reads in data points and the intercepts of the panel sides on the  $x$  and  $y$  axes; it calls `E02ZAF` to set up the index array `POINT`; and finally it prints the data points in panel order.

### 9.1 Program Text

**Note.** The listing of the example program presented below uses bold italicised terms to denote precision-dependent details. Please read the Users' Note for your implementation to check the interpretation of these terms. As explained in the Essential Introduction to this manual, the results produced may not be identical for all implementations.

```
*      E02ZAF Example Program Text
*      Mark 14 Revised.  NAG Copyright 1989.
*      .. Parameters ..
      INTEGER          MMAX, MAXPX, MAXPY, NADMAX, NPOINT
      PARAMETER       (MMAX=20, MAXPX=12, MAXPY=12, NADMAX=(MAXPX-7)
+                    *(MAXPY-7), NPOINT=MMAX+NADMAX)
      INTEGER          NIN, NOUT
      PARAMETER       (NIN=5, NOUT=6)
*      .. Local Scalars ..
      INTEGER          I, IADRES, IFAIL, M, NADRES, PX, PY
*      .. Local Arrays ..
      real             LAMDA(MAXPX), MU(MAXPY), X(MMAX), Y(MMAX)
      INTEGER          ADRES(NADMAX), POINT(NPOINT)
*      .. External Subroutines ..
      EXTERNAL        E02ZAF
*      .. Executable Statements ..
      WRITE (NOUT,*) 'E02ZAF Example Program Results'
*      Skip heading in data file
```

```

      READ (NIN,*)
20  READ (NIN,*) M
      IF (M.GT.0 .AND. M.LE.MMAX) THEN
          READ (NIN,*) PX, PY
          IF (PX.LE.MAXPX .AND. PY.LE.MAXPY) THEN
              NADRES = (PX-7)*(PY-7)
*           Read data points and intercepts of panel sides
              READ (NIN,*) (X(I),Y(I),I=1,M)
              IF (PX.GT.8) READ (NIN,*) (LAMDA(I),I=5,PX-4)
              IF (PY.GT.8) READ (NIN,*) (MU(I),I=5,PY-4)
*           Sort points into panel order
              IFAIL = 0
*
*           CALL E02ZAF(PX,PY,LAMDA,MU,M,X,Y,POINT,NPOINT,ADRES,NADRES,
+                IFAIL)
*
*           Output points in panel order
              DO 60 I = 1, NADRES
                  WRITE (NOUT,*)
                  WRITE (NOUT,99999) 'Panel', I
                  IADRES = M + I
40                 IADRES = POINT(IADRES)
                  IF (IADRES.GT.0) THEN
                      WRITE (NOUT,99998) X(IADRES), Y(IADRES)
                      GO TO 40
                  END IF
60                 CONTINUE
                  GO TO 20
              END IF
          END IF
          STOP
*
99999 FORMAT (1X,A,I4)
99998 FORMAT (1X,2F7.2)
      END

```

## 9.2 Program Data

E02ZAF Example Program Data

```

10
 9
10
0    0.77
0.70 1.06
1.44 0.33
0.21 0.44
1.01 0.50
1.84 0.02
0.71 1.95
1.00 1.20
0.54 0.04
1.53 0.18
1.00
0.80
1.20
0

```

### 9.3 Program Results

#### E02ZAF Example Program Results

Panel 1  
0.00 0.77  
0.21 0.44  
0.54 0.04

Panel 2  
0.70 1.06

Panel 3  
0.71 1.95

Panel 4  
1.44 0.33  
1.01 0.50  
1.84 0.02  
1.53 0.18

Panel 5

Panel 6  
1.00 1.20

---