

G03EHF – NAG Fortran Library Routine Document

Note. Before using this routine, please read the Users' Note for your implementation to check the interpretation of bold italicised terms and other implementation-dependent details.

1 Purpose

G03EHF produces a dendrogram from the results of G03ECF.

2 Specification

```

SUBROUTINE G03EHF(ORIENT, N, DORD, DMIN, DSTEP, NSYM, C, LENC,
1                IFAIL)
  INTEGER          N, NSYM, LENC, IFAIL
  real            DORD(N), DMIN, DSTEP
  CHARACTER*1      ORIENT
  CHARACTER*(*)    C(LENC)

```

3 Description

Hierarchical cluster analysis as performed by G03ECF can be represented by a tree that shows at which distance the clusters merge. Such a tree is known as a dendrogram. See Everitt [1] and Krzanowski [2] for examples of dendrograms. A simple example is,

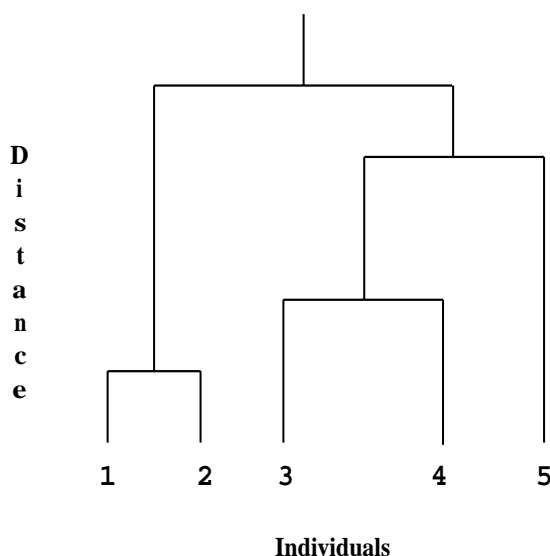


Figure 1

The end-points of the dendrogram represent the objects that have been clustered. They should be in a suitable order as given by G03ECF. Object 1 is always the first object. In the example above the height represents the distance at which the clusters merge.

The dendrogram is produced in a character array using the ordering and distances provided by G03ECF. Suitable characters are used to represent parts of the tree.

There are four possible orientations for the dendrogram. The example above has the end-points at the bottom of the diagram which will be referred to as south. If the dendrogram was the other way around with the end-points at the top of the diagram then the orientation would be north. If the end-points are at the left-hand or right-hand side of the diagram the orientation is west or east. Different symbols are used for east/west and north/south orientations.

4 References

- [1] Everitt B S (1974) *Cluster Analysis* Heinemann
 [2] Krzanowski W J (1990) *Principles of Multivariate Analysis* Oxford University Press

5 Parameters

- 1:** ORIENT — CHARACTER*1 *Input*
On entry: indicates which orientation the dendrogram is to take.
 If ORIENT = 'N' then the end-points of the dendrogram are to the north.
 If ORIENT = 'S' then the end-points of the dendrogram are to the south.
 If ORIENT = 'E' then the end-points of the dendrogram are to the east.
 If ORIENT = 'W' then the end-points of the dendrogram are to the west.
Constraint: ORIENT = 'N', 'S', 'E' or 'W'.
- 2:** N — INTEGER *Input*
On entry: the number of objects in the cluster analysis.
Constraint: $N \geq 2$.
- 3:** DORD(N) — *real* array *Input*
On entry: the array DORD as output by G03ECF. DORD contains the distances, in dendrogram order, at which clustering takes place.
Constraint: $DORD(N) \geq DORD(i)$ for $i = 1, 2, \dots, N-1$.
- 4:** DMIN — *real* *Input*
On entry: the clustering distance at which the dendrogram begins.
Constraint: $DMIN \geq 0.0$.
- 5:** DSTEP — *real* *Input*
On entry: the distance represented by one symbol of the dendrogram.
Constraint: $DSTEP > 0.0$.
- 6:** NSYM — INTEGER *Input*
On entry: the number of character positions used in the dendrogram. Hence the clustering distance at which the dendrogram terminates is given by $DMIN + NSYM \times DSTEP$.
Constraint: $NSYM \geq 1$.
- 7:** C(LENC) — CHARACTER*(*) *Output*
Note. The length of each element of C must be at least $3 \times N$ if ORIENT = 'N' or 'S', or at least NSYM if ORIENT = 'E' or 'W'.
On exit: the elements of C contain consecutive lines of the dendrogram.
- 8:** LENC — INTEGER *Input*
On entry: the dimension of the array C as declared in the (sub)program from which is called.
Constraints:
 if ORIENT = 'N' or 'S', $LENC \geq NSYM$,
 if ORIENT = 'E' or 'W', $LENC \geq N$.

9: IFAIL — INTEGER*Input/Output*

On entry: IFAIL must be set to 0, -1 or 1. For users not familiar with this parameter (described in Chapter P01) the recommended value is 0.

On exit: IFAIL = 0 unless the routine detects an error (see Section 6).

6 Error Indicators and Warnings

If on entry IFAIL = 0 or -1, explanatory error messages are output on the current error message unit (as defined by X04AAF).

Errors detected by the routine:

IFAIL = 1

On entry, $N < 2$,

or $NSYM < 1$,

or $DMIN < 0.0$,

or $DSTEP \leq 0.0$,

or $ORIENT \neq 'N', 'S', 'E', \text{ or } 'W'$,

or $ORIENT = 'N' \text{ or } 'S', LENC < NSYM$,

or $ORIENT = 'E' \text{ or } 'W', LENC < N$,

or the number of characters that can be stored in each element of array C is insufficient for the requested orientation.

IFAIL = 2

On entry, $DORD(N) < DORD(i)$, for some $i = 1, 2, \dots, N-1$.

7 Accuracy

Not applicable.

8 Further Comments

The scale of the dendrogram is controlled by DSTEP. The smaller the value DSTEP is, the greater the amount of detail that will be given but NSYM will have to be larger to give the full dendrogram. The range of distances represented by the dendrogram is DMIN to $NSYM \times DSTEP$. The values of DMIN, DSTEP and NSYM can thus be set so that only part of the dendrogram is produced.

The dendrogram does not include any labelling of the objects. The user can print suitable labels using the ordering given by the array IORD returned by G03ECF.

9 Example

Data consisting of three variables on five objects are read in. Euclidean squared distances are computed using G03EAF and median clustering performed by G03ECF. G03EHF is used to produce a dendrogram with orientation east and a dendrogram with orientation south. The two dendrograms are printed.

9.1 Program Text

Note. The listing of the example program presented below uses bold italicised terms to denote precision-dependent details. Please read the Users' Note for your implementation to check the interpretation of these terms. As explained in the Essential Introduction to this manual, the results produced may not be identical for all implementations.

```

*      G03EHF Example Program Text
*      Mark 16 Release. NAG Copyright 1992.
*      .. Parameters ..
INTEGER          NIN, NOUT
PARAMETER       (NIN=5,NOUT=6)
INTEGER          NMAX, MMAX, LDC
PARAMETER       (NMAX=10,MMAX=10,LDC=100)
*      .. Local Scalars ..
real           DMIN, DSTEP
INTEGER          I, IFAIL, J, LDX, M, METHOD, N, NSYM
CHARACTER       DIST, SCALE, UPDATE
*      .. Local Arrays ..
real           CD(NMAX-1), D(NMAX*(NMAX-1)/2), DORD(NMAX),
+               S(MMAX), X(NMAX,MMAX)
INTEGER          ILC(NMAX-1), IORD(NMAX), ISX(MMAX), IUC(NMAX-1),
+               IWK(2*NMAX)
CHARACTER*50     C(LDC)
*      .. External Subroutines ..
EXTERNAL        G03EAF, G03ECF, G03EHF
*      .. Executable Statements ..
WRITE (NOUT,*) 'G03EHF Example Program Results'
*      Skip heading in data file
READ (NIN,*)
READ (NIN,*) N, M
IF (N.LE.NMAX .AND. M.LE.MMAX) THEN
    READ (NIN,*) METHOD
    READ (NIN,*) UPDATE, DIST, SCALE
    DO 20 J = 1, N
        READ (NIN,*) (X(J,I),I=1,M)
20    CONTINUE
    READ (NIN,*) (ISX(I),I=1,M)
    READ (NIN,*) (S(I),I=1,M)
    READ (NIN,*) DMIN, DSTEP, NSYM
*
*      Compute the distance matrix
*
    IFAIL = 0
    LDX = NMAX
*
    CALL G03EAF(UPDATE,DIST,SCALE,N,M,X,LDX,ISX,S,D,IFAIL)
*
*      Perform clustering
*
    IFAIL = 0
*
    CALL G03ECF(METHOD,N,D,ILC,IUC,CD,IORD,DORD,IWK,IFAIL)
*
*      Produce dendrograms
*
    IFAIL = 0
*
    CALL G03EHF('E',N,DORD,DMIN,DSTEP,NSYM,C,LDC,IFAIL)
*
    WRITE (NOUT,*)

```

```

        WRITE (NOUT,*) 'Dendrogram, Orientation East'
        DO 40 I = 1, N
            WRITE (NOUT,*) C(I)
40      CONTINUE
*
        READ (NIN,*) DMIN, DSTEP, NSYM
        IFAIL = 0
*
        CALL G03EHF('S',N,DORD,DMIN,DSTEP,NSYM,C,LDC,IFAIL)
*
        WRITE (NOUT,*)
        WRITE (NOUT,*) 'Dendrogram, Orientation South'
        DO 60 I = 1, NSYM
            WRITE (NOUT,*) C(I)
60      CONTINUE
        END IF
        STOP
*
        END

```

9.2 Program Data

G03EHF Example Program Data

```

5 3
5
'I' 'S' 'U'
1 1.0 1.0
2 1.0 2.0
3 6.0 3.0
4 8.0 2.0
5 8.0 0.0
0 1 1
1 1 1
0.0 1.1 40
0.0 1.0 40

```

9.3 Program Results

G03EHF Example Program Results

Dendrogram, Orientation East

```

.....(
(
(
(.....(
(.....(

```

